







| | | | 7 | 770 lbs / 3x l | |
|-----|----------|---|---------|----------------|---------------|
| 4 m | -3ft 3in | 0 | 3ft 3in | 6ft 7in | 9ft 10in -3ft |


| TECHNICAL DATA | COMPACT 14 | | |
|--|---------------------|--|--|
| Madie a beink | 10.05 | | |
| Working height | 13.85 m | | |
| Platform height | 11.85 m | | |
| Lift capacity | 350 kg | | |
| A Platform length - outside | 2.31 m | | |
| Platform length - extended | 3.23 m | | |
| Length - extension | 0.92 m | | |
| Platform width - outside | 1.2 m | | |
| D Storage height | 2.08 m | | |
| C Height - stowed | 2.5 m | | |
| B Overall width | 1.2 m | | |
| E Length | 2.49 m | | |
| Wheelbase | 1.86 m | | |
| G Ground clearance - Center | 13 cm | | |
| Ground clearance - Pothole guards deployed | 2.3 cm | | |
| Drive speed | 0.9 - 2.7 km/h | | |
| Driveable at full height up to | 11.85 m | | |
| Gradeability | 23 % | | |
| Tilt | 2° / 3° | | |
| Lift / lower speed | 61 s / 50 s | | |
| Turning radius - outside | 2.38 m | | |
| Non-marking tires | 15 x 5 | | |
| Batteries | 24 V - 340 Ah (C20) | | |
| Hydraulic system capacity | 25 l | | |
| Weight | 3 168 kg | | |

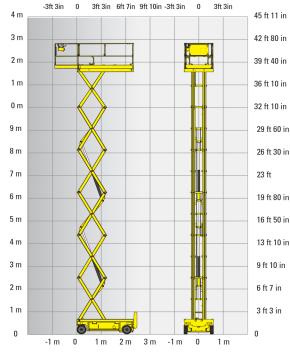

STANDARD EQUIPMENT

- Pothole guards
- Battery charge indicator
- Proportional lift and drive
- Removable control box in platform
- Swing out component tray
- Battery charger with automatic stop
- Solid non-marking tyres
- Brake release
- Tilt controller
- Load Management System in the platform
- Manual platform lowering valve
- Integrated forklift pockets
- Towing hooks
- Horn
- Hourmeter





OPTIONS AND ACCESSORIES

- Flashing light
- Travel alarm
- Working light
- Power to platform
- Biodegradable hydraulic oil
- Centralised battery filling



CÔNG TY TNHH CƠ GIỚI VẬN TẢI TIẾN PHÁT

HOTLINE: 0931.335.628 Website: vantaitienphat247.com